



复合型亲水涂层
提升球囊通过性

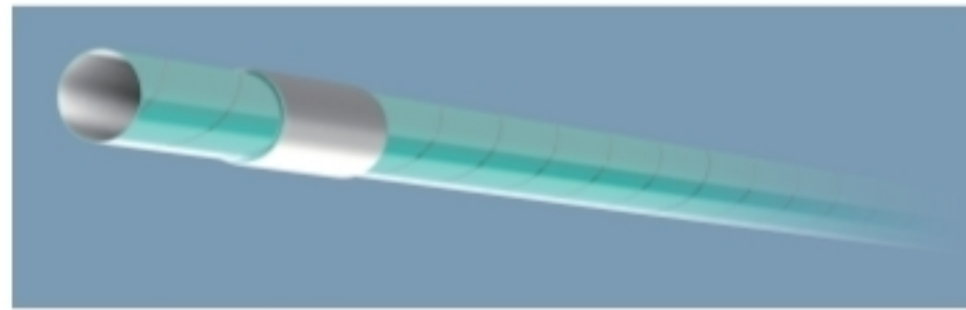

金属切割海波管设计
螺旋型切割长度与推送杆长度相对应，推送性、跟踪性能优秀，满足不同的临床需求

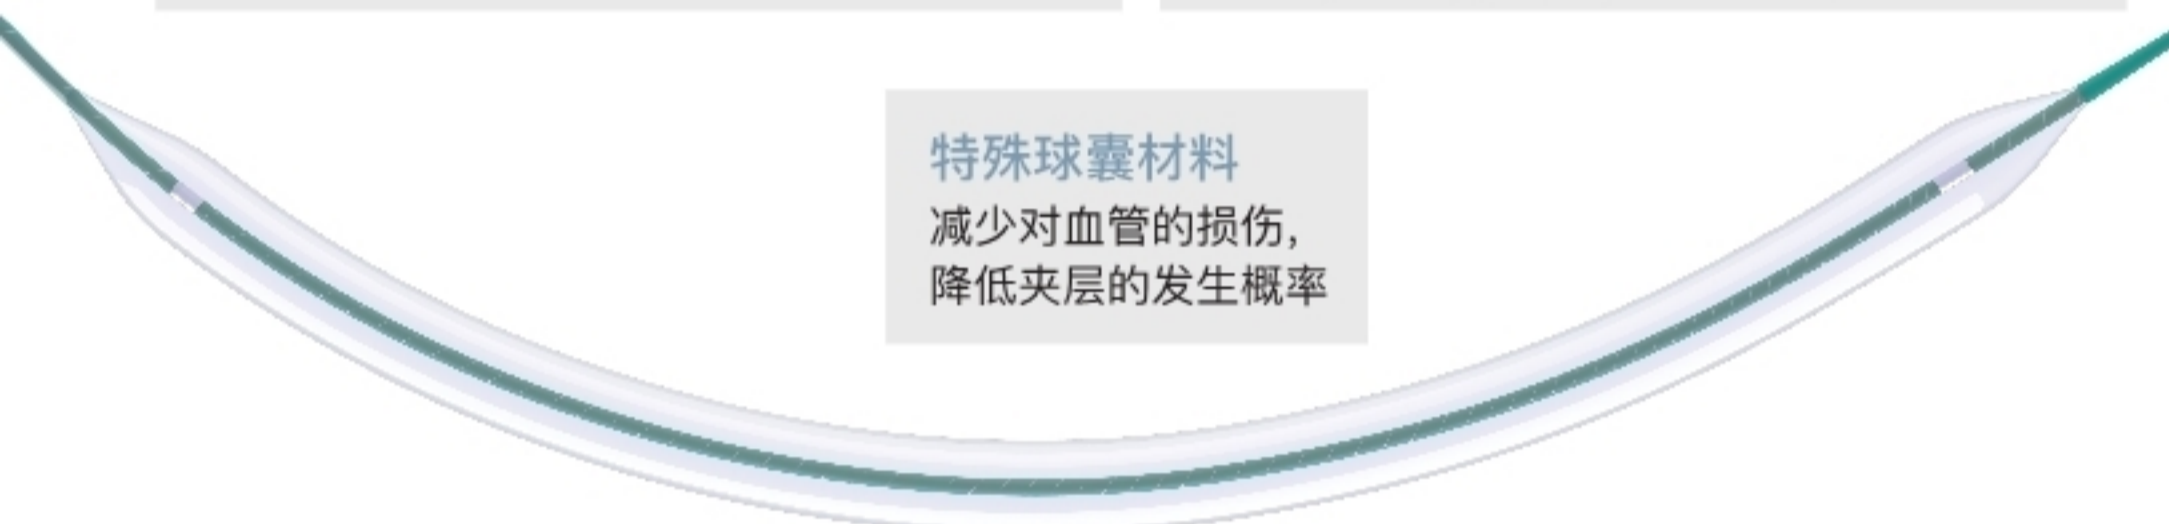

特殊球囊材料
减少对血管的损伤，降低夹层的发生概率

球囊直径 (mm)	球囊长度 (mm)	导管有效长度 (mm)	名义压力 (atm)	额定爆破压力 (atm)	导丝尺寸 (inch)	导管类型	球囊材料	压握
2.0	20/40/60/ 80/100/ 120/150/ 220	90/150	6	14	0.018"	同轴 (OTW)	尼龙	三翼折叠 
2.5		90/150	6	14				
3.0		90/150	6	14				
3.5		90/150	6	14				
4.0		90/130/150	6	14				六翼折叠 
5.0		90/130	6	13				
6.0		90/130	6	13				
7.0		90/130	6	12				

Reewarm[®]

外周球囊扩张导管

Through
Anyway

